

CR-4000

"The Independent"

"INNOVATORS IN GAS DETECTION"

BW
Technologies



Four Channel Gas Detection Controller



Loop Powered
Provides 24 VDC
power to the gas
sensing transmitter



ISO 9001

Fixed Gas Monitoring Systems

FEATURES

For continuous monitoring and control of toxic gases, combustible gases and oxygen hazards, the CR-4000 is designed for installation and operational simplicity.

- △ "STATUS at a Glance" Individual continuous alphanumeric "Status" LCD for each channel
- △ Slim profile, depth only 2.4 inches (6.35 cm)
- △ Easy Installation - simply hang on the wall, connect the power (AC or DC) and gas transmitters
- △ Local 85 dB audible alarm
- △ Field programmable alarm levels on each channel
- △ Simple operation
- △ Mix, match or change the gases monitored
- △ Three standard common, 10 amp SPDT relays. Low, High and Fault general Alarms
- △ Up to eight additional discrete relays - 2 per channel for LOW and HIGH Alarms. Each channel is programmable for energized/de-energized, latching/non-latching and audible ON/OFF
- △ Multi-functional external RESET. Can be used to reset or cancel all latched alarms; displays Peak (maximum) gas detected on each channel and tests all audible/visual alarms
- △ Accepts 4-20 mA signal input from any 4-20 mA gas transmitter

Ordering Information

CR-4000 4-20 mA AC/DC Controller

Accessories and Options

Optional 10 amp SPDT Low and High Alarm relays
CR4-R1000 Channel 1
CR4-R1200 Channels 1/2
CR4-R1230 Channels 1/2/3
CR4-R1234 Channels 1/2/3/4
CR4-BAT1 Battery Back-up (110/220 VAC or 24 VDC)

Compatible with BW 4-20 mA Gas Transmitters

GasPoint CD-420
GasPoint IR ToxyPoint
I. S. Plant Rat RRJ Monitors

www.gasmonitors.com

Email: info@bwt.net

CR-4000

Four Channel Gas Detection Controller

Simply select the pre-programmed channel switch for:

- △ Gas type
- △ Sensor range
- △ Alarm level

Standard Common Relays (included)
High alarm, Low alarm and Fault

Special Features

Records and Displays Peak (Max) gas detected by each channel on demand.

Auto Fuses protect all circuits.
Fuses reset automatically when the circuit power returns to normal. No fuse replacement required.

Accessories and Options

Relays (up to eight)

Two (2) factory installed 10 amp SPDT relays per channel. The Low Alarm/High Alarm independent discrete relays are user adjustable for power and assignment, including normally energized/de-energized, latching/non-latching, zoning (Park) and audible alarm activation.

Battery Back-up

The two (2) 1.2 amp hr. 12 volt batteries can be installed at any time in the field.

Select from the BW family of 4-20 mA gas transmitters:

- GasPoint • GasPoint IR • CD-420
- I.S. Plant Rat • ToxiPoint • RRJ

CR-4000 Gas Detection Channels Measuring Ranges Applicable

Combustibles: 0-100% LEL
Oxygen: 0-25% v/v
H₂S: 0-20, 0-50, 0-100, 0-500 ppm
CO: 0-50, 0-100, 0-200, 0-500, 0-1000 ppm
SO₂: 0-10, 0-20, 0-50, 0-100 ppm
NH₃: 0-50, 0-100 ppm
Cl₂: 0-5.0, 0-10.0, 0-100 ppm
HCN: 0-20.0, 0-50.0, 0-100 ppm
NO: 0-50, 0-100 ppm
NO₂: 0-10.0 ppm

"INNOVATORS IN GAS DETECTION"



For Further Information:
1-800-663-4164 North America
+44 (0) 1869-233004 Europe & UK
+1-403-248-9226 Other Countries
Fax: 1-403-273-3708
242, 3030 - 3 Avenue N.E.
Calgary, AB, Canada T2A 6T7

E-mail: info@bwnet.com
www.gasmonitors.com

SPECIFICATIONS

POWER: Field selectable for AC (115 and 230 VAC) or DC (24 VDC)
AC Input: 115 VAC 50-60 Hz standard; 230 VAC 50-60 Hz
DC Input: 24 VDC (18 to 28 VDC)
Back-up: Optional battery back-up 24 VDC supply. Approx. 3 hours in normal operation

ENVIRONMENTAL
Operating Temperature: -4 to +122°F (-20 to +50°C)
Relative Humidity: 5 to 99% non-condensing
Enclosure Rating: Nema 12

PHYSICAL
Dimensions (dxwxh): 2.4 x 13 x 9.5 inches (6 x 33 x 24 cm)
Weight: 4.85 lb. (2.2 kg)
Enclosure: Enameled steel RFI/EMI protected
Wire Terminations: Screw type terminal blocks
Wiring Ports: Seven (7) each 3/4 inch (22 mm) NPT ports
Mounting: Wall mounted—equipped with hanging slots and hinged door

ALARMS: Two set points—user programmable—with simple rotary switch
Audible: 85 dB buzzer

OUTPUTS
SPDT relays: 10 amp @ 110 VAC/24 VDC, 8 amp @ 230 VAC
Alarm Relays: Standard: One (1) common low gas alarm, de-energized, non-latching
One (1) common high gas alarm, de-energized, latching
One (1) common fault alarm, normally energized, non-latching
Optional: Two (2) per channel; one (1) low gas and one (1) high gas alarm
Field selectable: energized/de-energized; latching/non-latching; zoning (Park) function and audible alarm ON/OFF


DISPLAY PANEL
Backlit LCDs: Four (4) independent 3 digit alphanumeric *Status* displays
Field selectable readouts for: %LEL, PPM and/or O₂ % v/v.
LED Indicators: Alarms: Three (3) - "LOW" (red), "HIGH" (red), "FAULT" (amber)
Power: Two (2) "ON" AC icon (green), DC icon (green)
Gas: Concentration Icons — ppm, %LEL, %O₂,

CONTROLS: Two (2) large push-buttons: Alarm Reset/Acknowledge, Peak exposures, Lamp Test (audible/visual alarm test)
Alarm set points: Simple Up/Down buttons

WARRANTY: Two (2) years non-prorated

DUE TO ON-GOING RESEARCH AND PRODUCT IMPROVEMENT, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

RATINGS AND CERTIFICATIONS: cCSA_{us} Ordinary locations
International Electrical Code: IEC No. 1010
U.S. Standard: ANSI/ISA S82.01
Canadian Standard Electrical Code: C22.2 No. 1010

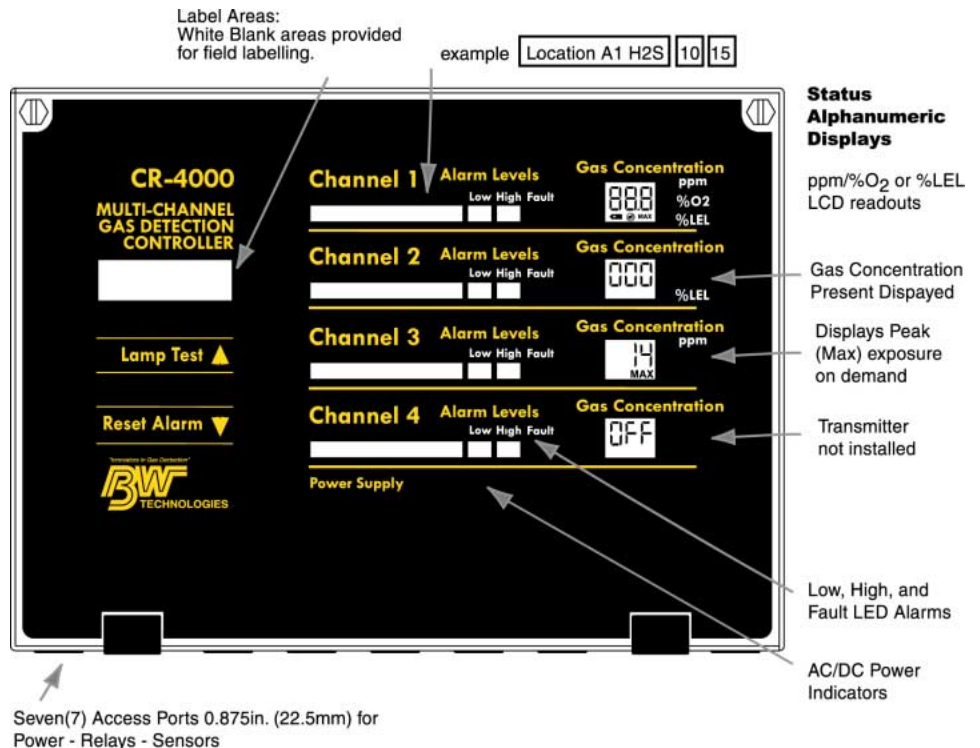

Locally Distributed By: