


FX-SMT™

Intelligent Single Gas Transmitter

The FX-SMT Transmitter is loaded with industry features. These transmitters come standard with non-intrusive calibration which eliminates the need to declassify hazardous areas, a user adjustable "calibration reminder" message, and pre-calibrated sensors for quick plug-in operation.

This single gas transmitter can be configured for the detection of hydrocarbons, AsH_3 , B_2H_6 , Cl_2 , ClO_2 , CO , F_2 , HCl , HCN , HF , H_2S , NH_3 , NO , NO_2 , O_2 , O_3 , PH_3 , SiH_4 or SO_2 .

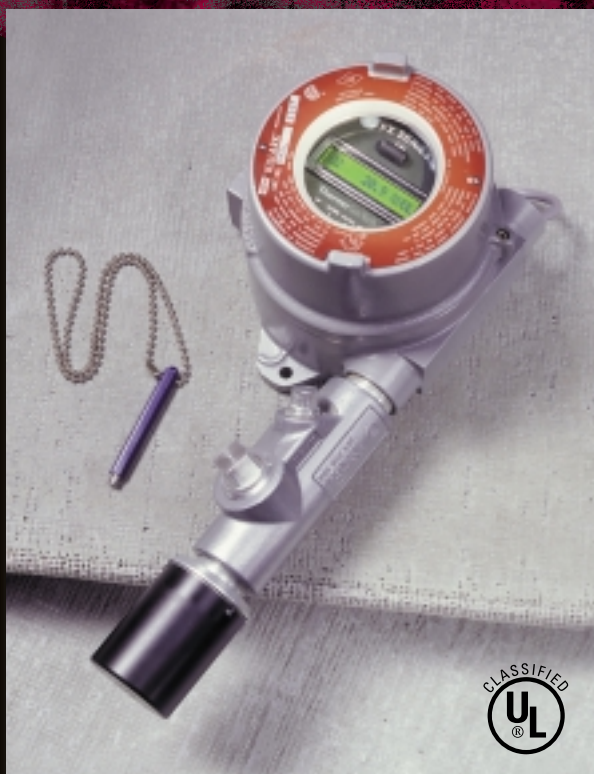

Optional Accessories

- Splash guard
- Calibration kit
- Local Alarm Relay Module

Features

- Dual ranges standard for hydrocarbon gases (LEL/ppm)
- Non-intrusive calibration via a magnetic wand eliminates the need to declassify hazardous areas
- User adjustable "calibration reminder" message
- Pre-calibrated sensors for quick plug-in operation
- Using an optional adapter, oxygen and toxic gas detectors can be mounted up to 25 ft. away from the transmitter; 200 ft. for hydrocarbon gases (no adapter required)
- Connect to Thermo GasTech's controllers, PLC (Programmable Logic Controllers) or DCS (Distributive Control System)
- Industry standard, 4 to 20 mA output
- Housed in a rugged, copper-free aluminum enclosure (weather & explosion-proof)
- User friendly – simple to operate
- Economical
- Splash resistant NEMA 4X



FX-SMT (LEL or PPM)
(combustible)



FX-SMTn

